



安装外形图 Overall dimension

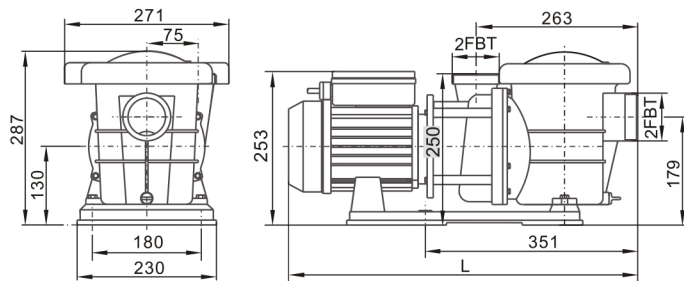

型号 Model	L
STP150	573
STP200	573
STP250	573
STP300	598

性能曲线 Performance curves

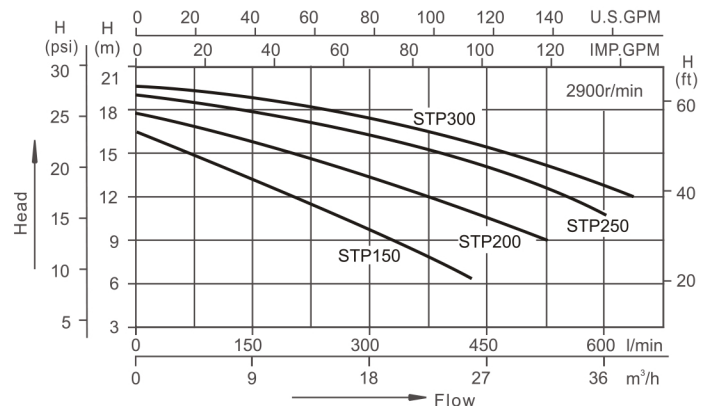

EN 60335-1: 2012+A11
EN 60335-2-41: 2003+A1+A2
EN 62233 : 2008
ZEK 01.04-08/11.11
ERP547 / 2012

SAA

AS/NZS60335.1
AS/NZS60335.2.41



海水养殖循环过滤
Mariculture circulation filter




泳池循环过滤
Recirculation of water in swimming pool equipment

工作条件

介质温度: 5-50℃
环境温度: ≤50℃
最大工作压力: 0.3MPa

Working conditions

Medium temperature: 5-50℃
Environmental temperature: ≤50℃
Max. working pressure: 0.3MPa

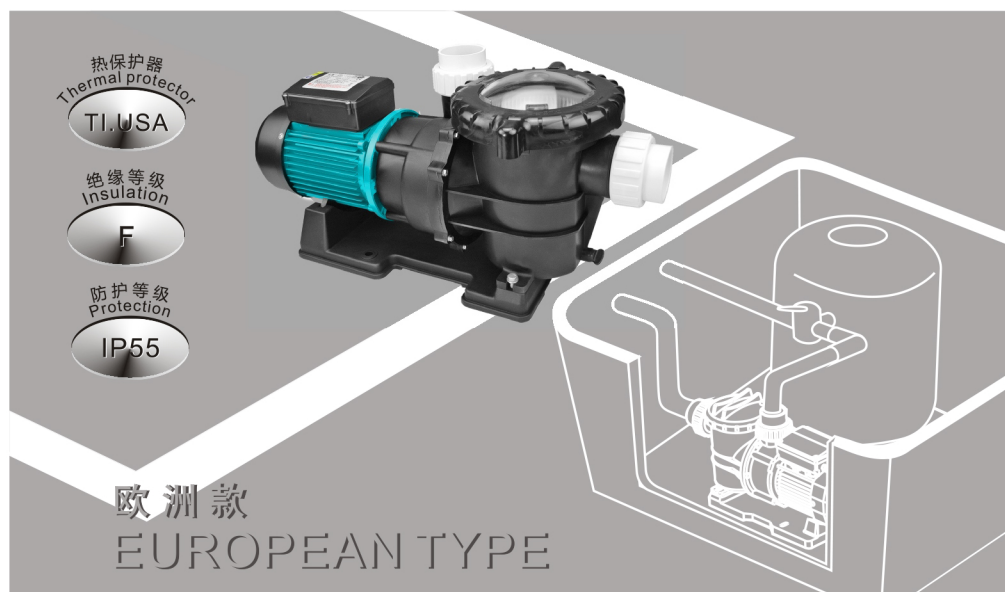

技术参数列表 Technical parameter list

型号 Model	最大流量 Qmax (l/min)	最大扬程 Hmax (m)	电压/频率 V/Hz	输入功率 Power(P ₁) kW HP	电流 (Amps)	接头尺寸 Fitting size (mm)	毛重 G.W (Kg)	包装尺码 Packing size (mm)
STP150	430	16.5	220-240/50	1.1 1.5	5.8	60.3or63	14	600×295×345
STP200	520	18	220-240/50	1.5 2.0	7.0	60.3or63	15.5	600×295×345
STP250	600	19	220-240/50	1.85 2.5	8.5	60.3or63	16.5	600×295×345
STP300	635	19.5	220-240/50	2.2 3.0	10	60.3or63	18	625×295×345

230V/60Hz, 110V/60Hz, 110V/50Hz models are available on request

序号 NO.	名称 Name
1	接头螺母 Tie-in Nut
2	接头 Tie
3	O形圈 O-Ring
4	放水螺塞 Drainage Plug
5	O形圈 O-Ring
6	六角头螺栓和平垫圈组合件 Hexagon head bolt and plain washer assembling
7	泵盖 Pump Cover
8	滤篮 Filter
9	O形圈 O-Ring
10	透视盖 Transparent Cover
11	透视盖压盖 Gland Cover
12	O形圈 O-Ring
13	盖板 Cover panel
14	十字槽盘头自攻螺钉 Cross recessed pan head tapping screws
15	叶轮 Impeller
16	机械密封 Mechanical seal
17	泵壳 Pump Casing

序号 NO.	名称 Name
18	电机 Motor
19	底板胶条 Block Gine
20	六角头螺栓 Hexagon bolt
21	平垫圈 Washer
22	底板 Base

